

adesivi

## TECHNICAL DATA SHEET



Review 007, 05/2016

Page 1 of 4

### PRODUCT

EPOKITT EPOXY SYSTEM

### FEATURES

EPOKITT epoxy system is a 2k epoxy putty, with inert inorganic charges, tixotropized, and solvent free. It is completely reactive and not subject to cure shrinkage when forming a thin film. As the system is in paste form, it can be applied also to vertical surfaces.

Thanks to high reactivity, the system can be used also at low temperatures (up to 5°C).

It is ideal for structural adhesion of different materials and shapes (brick, marble, granite, wood, aluminum, iron, porcelain), anchorages, sealing and smoothing.

Since EPOKITT epoxy putty is neutral it can also be coloured according to user needs.

### TECHNICAL DATA – TIXO VERSION

|                 | Putty          | Normal hardener | Fast hardener |                     |
|-----------------|----------------|-----------------|---------------|---------------------|
| Specific weight | 1850 ± 20 g/l  | 1750 ± 20 g/l   | 1650 ± 50 g/l | (MI 001)            |
| V.O.C.          | 5 ± 1 g/l      |                 |               | (ASTM 2369)         |
| Viscosity       | 1600 ± 200 Pas | 150 ± 50 Pas    | /             | (MI 002, 2B; 25 °C) |
| Consistency     | 1350 ± 150 Pas | 125 ± 50 Pas    | /             | (MI 002B; 25°C)     |
| Formulations    | M5104          | M5100           | M5101         |                     |
| Colour          | Ice white      | Pale grey       | Pale grey     |                     |

### TECHNICAL DATA – TRANSPARENT TIXO VERSION

|                 | Putty         | Hardener      |                |
|-----------------|---------------|---------------|----------------|
| Specific weight | 1100 ± 20 g/l | 1000 ± 20 g/l | (MI 001)       |
| V.O.C.          | 5 ± 1 g/l     |               | (ASTM 2369)    |
| Viscosity       | 950 ± 150 Pas | 80 ± 20 Pas   | (MI 002; 25°C) |
| Consistency     | 550 ± 100 Pas | /             | (MI 002; 25°C) |
| Formulations    | M5105         | M5102         |                |
| Colour          | Colorless     | Pale yellow   |                |

ILPA ADESIVI SRL

Via Ferorelli, 4 – Zona Industriale – 70123 BARI – Italy – Tel. 0805383837 – Ass. Tecnica Tel. 0805308036 – Export Dept. +390805308035 - Fax +390805377807  
Email: [ilpasrl@ilpa.it](mailto:ilpasrl@ilpa.it) – <http://www.ilpa.it> – Cap. Soc. €218.400,00 i.v. – R.E.A. n. 152397 – Cod. Fisc. e P. IVA n. IT 00465900728 – Reg. imp. Bari n. 6525



adesivi

## TECHNICAL DATA SHEET

Review 007, 05/2016

Page 2 of 4



### TECHNICAL DATA – FAST LIQUID VERSION

|                 | Putty         | Hardener      |                     |
|-----------------|---------------|---------------|---------------------|
| Specific weight | 1640 ± 50 g/l | 1460 ± 50 g/l | (MI 001)            |
| V.O.C.          | 5 ± 1 g/l     |               | (ASTM 2369)         |
| Viscosity       | 321 ± 5 hPas  | 551 ± 5 hPas  | (MI 002, 2B; 25 °C) |
| Formulations    | M5106         | M5103         |                     |
| Colour          | No pigmented  | No pigmented  |                     |

### STORAGE

Keep the container well closed and stored in a cool (temperature below 25°C) and ventilated environment for a maximum period of 12 months from the date of production marked on the tin. Avoid direct sun exposure.

### SAFETY RULES

Keep the place ventilated during application and drying processes. The use of personal protective equipment is recommended during application. Read carefully the safety data sheet before application.

### APPLICATION

- Remove dust, moisture, dirt and friable and incoherent parts from the surfaces to be joined. Generally it is enough mechanical abrasion or solvent degreasing.
- Mix the epoxy putty with the necessary quantity of hardener as to obtain an homogeneous mixture. To such effect, use mechanical mixers at slow speed or mix by hand using a spatula. To shape or finish, we recommend to moisten the spatula with solvent or denatured alcohol.
- Do not put back putty/catalyzed and/or used hardener in the can to prevent the entire contents of the can gets spoiled;
- The final cleaning of the tools can be done with a normal nitro solvent, acetone.
- Close the cans after use, in order to prevent the product hardens in contact with air.

ILPA ADESIVI SRL

Via Ferorelli, 4 – Zona Industriale – 70123 BARI – Italy – Tel. 0805383837 – Ass. Tecnica Tel. 0805308036 – Export Dept. +390805308035 - Fax +390805377807  
Email: [ilpasrl@ilpa.it](mailto:ilpasrl@ilpa.it) – <http://www.ilpa.it> – Cap. Soc. €218.400,00 i.v. – R.E.A. n. 152397 – Cod. Fisc. e P. IVA n. IT 00465900728 – Reg. imp. Bari n. 6525



adesivi

# TECHNICAL DATA SHEET




Review 007, 05/2016

Page 3 of 4




Application

Putty knife



**Mixing ratio**  
 massa o volume

 Tixo and Liquid version : 100 - 100  
 Transparent tixo version : 100 - 50
**Gel time**
 Normal version : 30 min  
 Fast version : 4 min

(MI 003; 25°C)

**Set time**
 Normal version : 60 - 90 min  
 Fast version : 10 - 15 min

(MI 012; 25°C)

**Full dry**

&gt; 24 h

(MI 012; 25°C)

**Polishable**
 Normal version : > 24 h  
 Fast version : 4 - 5 h

(MI 012 ; 25°C)

## ADDITIONAL INFORMATION

### DRYING (MI 003, MI 012)

| TEMPERATURE<br>(°C) | GEL TIME |       | SET TIME |           | FULL DRY |        |
|---------------------|----------|-------|----------|-----------|----------|--------|
|                     | NORMAL   | FAST  | NORMAL   | FAST      | NORMAL   | FAST   |
| 25                  | 30 min   | 4 min | 90 min   | 10-15 min | > 24 h   | > 24 h |
| 60                  | 5 min    | /     | 20 min   | /         | 3 h      | /      |

*Note: avoid catalysis at temperatures above 60 °C: this may cause the swelling of the product with subsequent loss of mechanical properties.*

*It is important to observe the mixing ratio for optimum performance of the product.*

ILPA ADESIVI SRL

Via Ferorelli, 4 - Zona Industriale - 70123 BARI - Italy - Tel. 0805383837 - Ass. Tecnica Tel. 0805308036 - Export Dept. +390805308035 - Fax +390805377807  
 Email: [ilpasrl@ilpa.it](mailto:ilpasrl@ilpa.it) - <http://www.ilpa.it> - Cap. Soc. €218.400,00 i.v. - R.E.A. n. 152397 - Cod. Fisc. e P. IVA n. IT 00465900728 - Reg. imp. Bari n. 6525



adesivi

## TECHNICAL DATA SHEET

Review 007, 05/2016

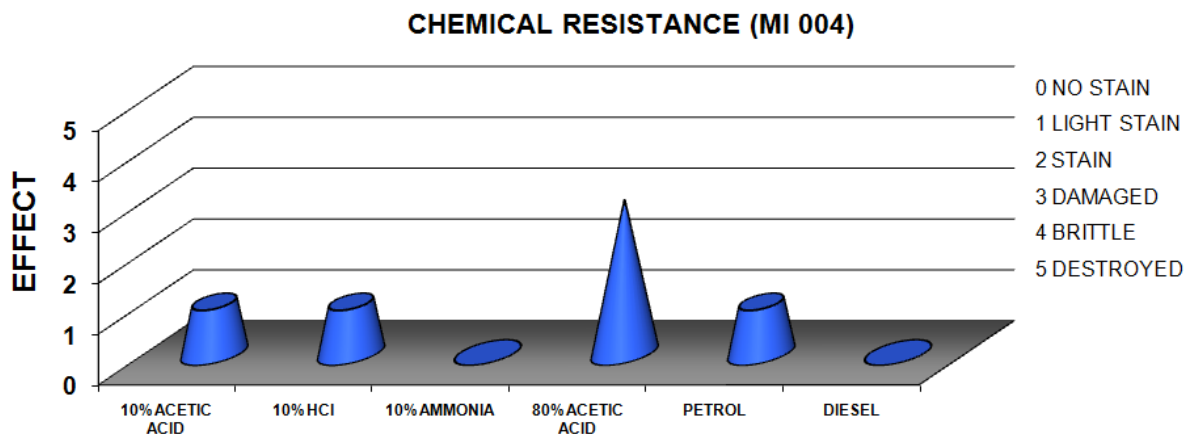
Page 4 of 4



EPOKITT epoxy putty is great for the reconstruction of damaged or broken parts; for filling crawl spaces or for gluing subjected to limited stress, the product can be further mixed with dry sand in the maximum ratio of 1:1.

The epoxy putty EPOKITT has the highest coefficient of adhesion on substrates such as brick, marble, granite, wood, aluminum, iron, porcelain; it can also be used on other types of substrates such as rubber, ceramics, glass, tiles and synthetic resins. It allow a perfect adhesion even of substrates of different nature.

The product has a high chemical resistance to acid and / or basic agents, organic solvents (see the chart).



ILPA ADESIVI SRL